


HWP 370

DATA SHEET


Ducted Water Cooled R410A Packaged Air Conditioners

Dimensions (mm)

Not to Scale

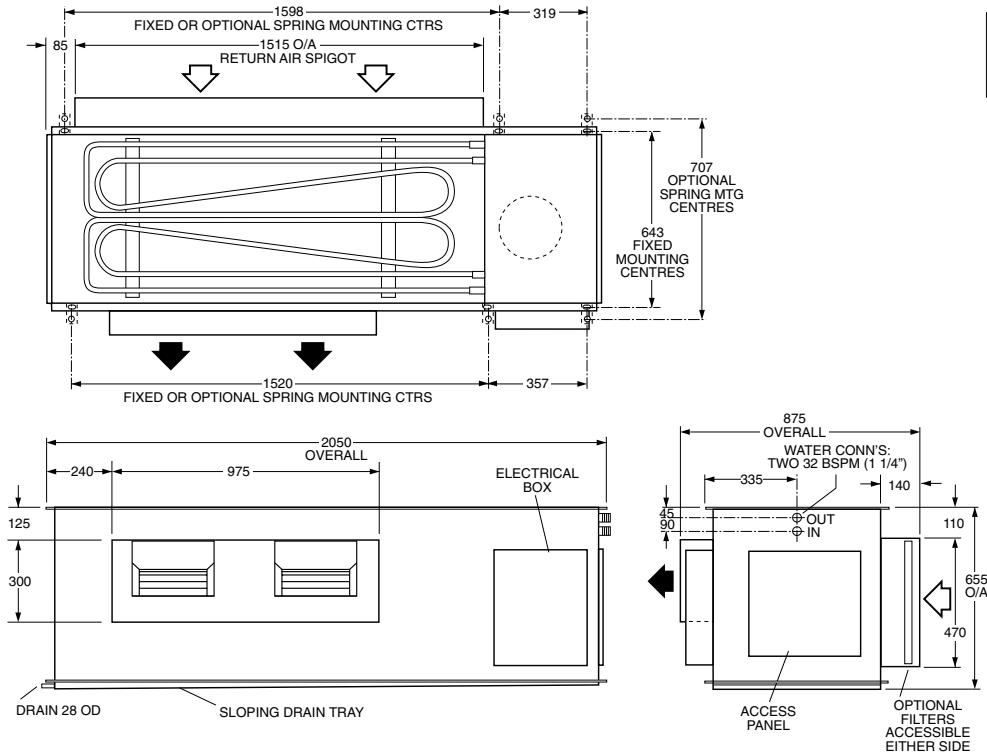

HWP 370



Net Weight 290 kg

COOLING CAPACITY (kW)

AIR FLOW RATE l/s	COIL E.A.T.		LEAVING WATER TEMPERATURE (L.W.T.) °C																							
	W.B. °C	D.B. °C	25				30				35				40				45				50			
			T	S	FL	HR	T	S	FL	HR	T	S	FL	HR	T	S	FL	HR	T	S	FL	HR				
1900	17	23	37.8	29.2	2.0	42.9	36.1	27.2	2.0	41.7	34.5	25.9	2.0	40.8	32.9	25.2	2.0	39.7	32.3	24.1	2.0	39.5	32.0	22.0	2.0	39.3
	19	27	40.5	29.3	2.0	45.5	40.0	28.8	2.0	45.7	36.6	28.6	2.0	42.8	35.7	27.2	2.0	42.7	32.9	26.8	2.0	39.8	32.3	26.3	2.0	39.8
	21	31	43.2	34.0	2.0	47.3	42.8	33.8	2.0	48.2	42.5	33.6	2.0	49.0	38.7	33.2	2.0	45.7	37.1	32.7	2.0	44.3	35.0	32.5	2.0	42.5

T = Total Capacity (kW)
FL = Water Flow (l/s)

S = Sensible Capacity (kW)
E.A.T. = Entering Air Temperature (°C)

HR = Heat Rejection (kW)
○ = Nominal Capacity (kW)

NOTE: Capacities are **gross** and do not include allowance for fan motor heat loss. For fan motor heat loss refer to Air Handling Performance. Water flow and cooling capacity based on 5 °C water temp. difference.

HEATING CAPACITY (kW)

HW*_R Reverse Cycle version

MODEL	WATER FLOW RATE l/s	COIL E.A.T. D.B. °C	LEAVING WATER TEMPERATURE (L.W.T.) °C											
			12.5				15.5				18.5			
			HC	HAb	EWT	INPT	HC	HAb	EWT	INPT	HC	HAb	EWT	INPT
HWP 370R	2.0	18	32.8	24.5	16.2	6.5	35.1	26.4	19.5	6.8	37.6	28.7	22.8	7.1
		21	32.5	23.8	16.2	6.9	34.9	25.8	19.4	7.2	37.5	28.1	22.7	7.6
		25	32.4	23.1	16.2	7.5	34.9	25.2	19.4	7.8	37.3	27.3	22.7	8.1


HC = Heating Capacity (kW)
HAb = Heat Absorbed (kW)

EWT = Entering Water Temperature (°C) (Minimum required 17°C)
INPT = Compressor Input (kW)

○ = Nominal Capacity (kW)

E.A.T. = Entering Air Temperature (°C)

AIR HANDLING PERFORMANCE Without Filter

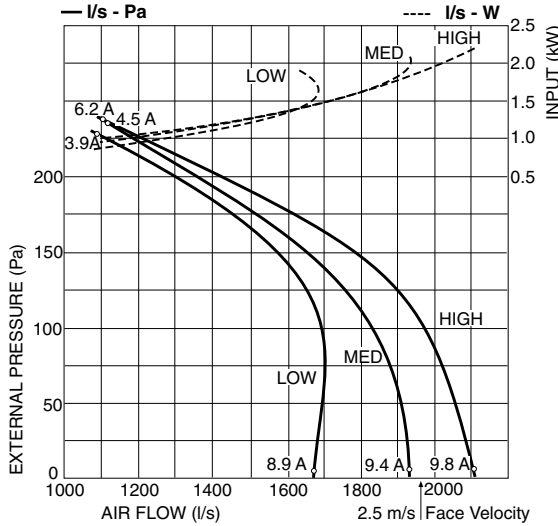

FILTER (clean)	Coil Face Velocity (m/s)	1.5	2.0	2.5
	Pressure Loss (Pa)	5	9	13

QUICK REFERENCE HWP 370

Electrical Input (Cooling)	9.35 kW
E.E.R. (Cooling)	3.71
Running Amps/ph. (Total)	14 / 19 / 19
Fan Motor Full Load Amps	4.9 x2
Electrical Supply Required	3 ph. 380-415V ±10% a.c. 50 Hz
Recom'd External Fuse Size	40 A
Refrigerant	HFC-410A (R410A)
Minimum Water Flow	2.0 l/s
Water Coil Pressure Drop	48.3 kPa (7 psi)
Filter (polypropylene net)	optional
Electric Heat Option	18 kW

Note

1. In tropical (high humidity) conditions care must be taken to select an air flow which gives a suitable coil face air velocity, to prevent water carry over.
2. For applications with low resistance be sure not to exceed the fan motor full load amps.
3. Applications using full or high proportions of fresh air should be referred to **temperzone** engineering office to establish the correct selection of units.

SOUND LEVELS

Note: SPL measured to JIS 8616 (1m from source in an anechoic chamber)

SUPPLY AIR OUTLET*

MODEL	FAN SPEED	AIR FLOW l/s
HWP 370	LOW	1900
	MED	1900
	HIGH	1900


SOUND PRESSURE LEVELS (SPL) dB(A)	SOUND POWER LEVELS (SWL) dB						
	SWL dB(A)	OCTAVE BAND FREQ. Hz					
		125	250	500	1 k	2 k	4 k
66	77	77	72	75	71	70	68
67	78	79	73	75	73	71	69
68	79	81	74	75	73	72	70

CASE BREAKOUT + RETURN AIR

SOUND PRESSURE LEVELS (SPL) dB(A)	SOUND POWER LEVELS (SWL) dB						
	SWL dB(A)	OCTAVE BAND FREQ. Hz					
		125	250	500	1 k	2 k	4 k
63	74	79	70	70	69	66	62
64	75	79	72	71	71	68	64
65	76	82	72	72	72	68	65

* Subtract 5 dB(A) when using 1m acoustic insulated duct

Recommendations for Noise Isolation:

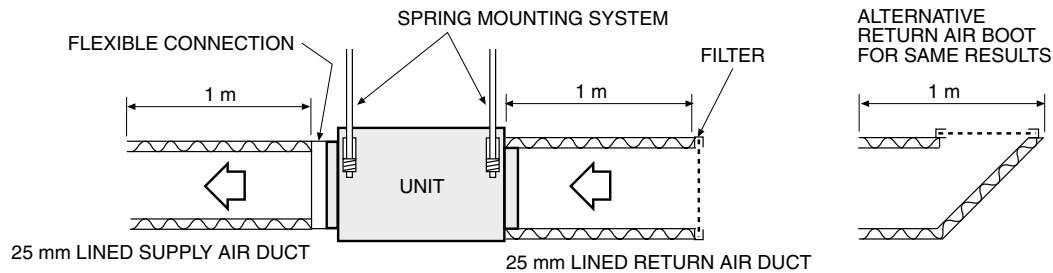

Sound Pressure Levels (SPL) Within A Room

Deduct the room absorption effect below from the Sound Power Levels (SWL) above to obtain Sound Pressure Levels within a room. Note: Occupant at least 1.5 m from sound source.

ROOM TYPE	OCTAVE BAND FREQ. Hz					
	125	250	500	1k	2k	4k
	ROOM ABSORPTION EFFECT					
SOFT	4	8	11	11	11	11
MEDIUM	3	7	8	9	9	9
HARD	0	1	3	4	4	5

NOTE

The manufacturer reserves the right to change specifications at any time without notice or obligation. Certified data available on request.